

Thermal Transfer Overprinter



Ultimate Efficiency

Printing speed up to 800 mm/s

Easy to Use

Simple Operator Interface Withstand Various Harsh Environments Good quality and few problems can extend the production time

Compact design

Compact body can be integrated intoexisting production lines. First choice for equipment manufacturers and system integrators

Easy to operate

10-inch full-color LCD touch screen control, large-screen operation, preview support. Operator errors can be reduced. Simple ribbon box design, fast replacement of ribbons, automatic identification and adjustment for quick work.1200m large ribbon capacity and various ribbon saving modes can reduce the frequency of ribbon replacement.

Machine management

Print head usage statistics, intelligent reminder to replace the print head

High-end manufacturing

Aerospace-grade aluminum , CNCmolding process, Industrial-grade standard body, rugged and durable.

Easy Operate

Human-machine interaction Consumables replacement reminder, Belt breakage reminder, Effortlessly monitor work status.

Professional Hardware

Self-developed PCBA motherboard, Industrial-grade high-performance CPU, Industrial-grade high-speed computing FPGA, Industrial-grade anti-interference solid-state electronic components, and SMT assembly process.

Application Area



Instant food flexible packaging



Baking tools flexible packaging



Beverage flexible packaging



Milk powder flexible packaging



Coffee flexible packaging



Candy flexible packaging



Product Description

R3000 series is an intermittent high-speed thermal transfer printer,printing speed up to 800 mm/s, print resolution up to 300DPI Support two print widths 32mm and 53mm, more than 40 languages, can print bar code, graphics and others, provide a cost-effective solution for your application.

Printing Capabilities



Puffed Food Film



Pasta product packaging




Plastic Packaging Film



Transparent Film

Dimensions

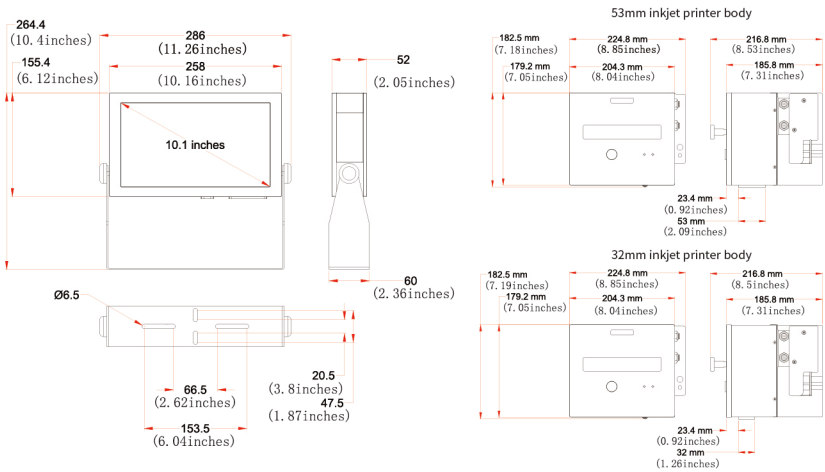

Machine Parameters

Brand	Codpad
Models	R3032 / R3053
Power Supply	AC 110-230V 50 / 60 Hz
Working Environment	Temperature:0-45°C, Humidity: 30-70%Rh
Dimensions	Coding Machine: 224.8 x 216.8 x 182.5 mm Controller: 258 x 155.4 x 52 mm
Printing Gap	≥ 0.1 mm
Printing Resolution	300 dpi
Material Types	High barrier film, stick packaging, sealed bag, sealed packaging, bagged, metallized label, decorative label
Operation Interface	10-inch full-color LCD touch screen control
Standard Communication	USB, RS232, TCP/IP, network interface, support network remote centralized control management, docking conveyor, intelligent resource planning, automatic packaging vision code/anti-severe deformation ability system, supervision code/anti-counterfeiting traceability system)

Printing Parameters

Air Supply & Air Consumption	1.5-4.0 Bar / 22.5-60 Psi
Operating Mode	Intermittent Printing
Print Mode	Thermal Transfer Overprint
Weight	Coding Machine: 7.5 kg Controller: 2.4 kg
Ribbon Width	24 / 33 / 35 / 55 mm
Ribbon Length	400 / 600 / 800 / 1200 m
Print Area	32 x 75 mm / 53 x 70 mm
Maximum Print Speed	200 - 350 mm / s (Up to 800 mm / s)
Print Content	Language characters/GS1 Data Matrix/Dynamic QR Code/barcode/graphics/serial number/date/shift/counter/variable database/Serial real-time dynamic data printing(multi-information group printing)